

CARBONBIND® A20E

POLYMER MODIFIED BINDER
Incorporating Biogenic (plant grown) material
Asphalt Applications

Puma CARBONBIND® A20E incorporates sustainably grown biogenic (plant grown) material. The CARBONBIND® technology allows atmospheric CO₂ captured by plants to be permanently stored in road pavements. This significantly reduces the carbon footprint of the overall binder and asphalt products that contain it.

Compared to unmodified binder, CARBONBIND® A20E delivers significantly improved levels of durability, rut resistance and fatigue performance to asphalt.



Key Benefits

Performance Benefits

- Improved cohesive strength over conventional bitumen
- Enhanced durability
- Externally verified to reduce carbon footprint by up to 132 kg/t compared to conventional A20E
- Includes ISCC+ certified sustainably grown biogenic component

Application Benefits


- Improved storage and travel stability over conventional SBS-modified binders
- Reduced odour compared to other biogenic binders

Typical characteristics

| Property | Typical Value | Specification Limits | Test Method |
|--------------------------------|---------------|----------------------|-------------|
| Softening Point (°C) | 82 | 65 – 95 | AG:PT/T131 |
| Torsional Recovery at 25°C (%) | 56 | 38 – 70 | AG:PT/T122 |
| Viscosity at 165°C (Pa.s) | 0.4 | max. 0.6 | AG:PT/T111 |
| Consistency 6% at 60°C (Pa.s) | 1700 | min. 500 | AG:PT/T121 |
| Stiffness at 15°C (kPa) | 21 | max. 35 | AG:PT/T121 |
| Segregation (%) | 0.5 | max. 8 | AG:PT/T108 |

Specification

CARBONBIND® A20E is manufactured to comply with ATS-3110 A20E grade.

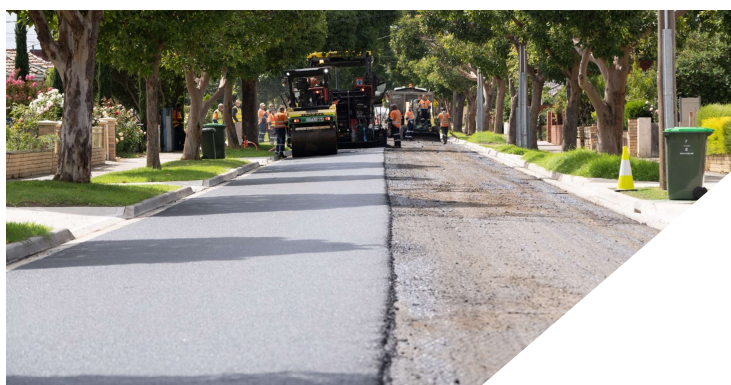

Storage & Handling

The storage of bituminous binders for prolonged periods at elevated temperatures should be avoided as quality may be adversely affected. Bituminous binders should be stored at the lowest temperature that enables practical use.

Temperature Recommendations

| | |
|----------------------------|-----------------|
| Storage for up to 48 hours | 160 °C – 175 °C |
| Storage for up to 7 days | 140 °C |
| Storage for up to 14 days | 120 °C |
| Asphalt mixing | 155 °C – 165 °C |
| Asphalt compaction | 150 °C – 165 °C |

Refer to AAPA Advisory Note 7 for further information.

Health & Safety

For a full description of hazards associated with the use of bituminous binders, please refer to the appropriate safety data sheet (SDS) available on the [Puma Bitumen website](#).

Quality assurance

Puma Bitumen is known in the industry for consistently delivering high quality products. Our products can be relied upon to perform under the most diverse and demanding road conditions in Australia. This is possible thanks to our innovative product technology, comprehensive quality assurance programmes, efficient operations and a sophisticated production process unique to Puma – all supported by our highly skilled and experienced staff.

The Puma Energy Global Bitumen Technology Centre based in Altona, Victoria, is where we conduct industry-leading research and development. It is also from here that we provide technical expertise and support to our customers throughout Australia and across the world. Our team of technical specialists is dedicated to ensuring our products are thoroughly tested at every stage – from the selection of crude oil at the start of the production process, right through to customer supply.

Our product stewardship and rigorous quality management practices reflect our commitment to delivering the highest quality products that perform on the road. Our dedication to quality is recognised by our accreditation to Australian Standard AS/NZS 9001.

The information in this guide is of a general nature and should only be used as a guide. Please contact Puma Bitumen staff to ensure you have access to the most current information and for advice relating to any particular circumstances. Puma Energy (Australia) Bitumen Pty Ltd makes no warranty as to the completeness or accuracy of the information provided and, to the fullest extent permitted by applicable law, Puma Energy and its subsidiaries are not liable for any costs, loss or damage incurred in connection with use of the information provided in this guide. The material contained in this guide is protected by copyright. Puma Energy, OLEXOBIT and OLEXOCRUMB are registered trademarks of Puma Energy.

© 2020 Puma Energy (Australia) Bitumen Pty Ltd, ABN 78 147 981 020, 47 - 61 Toll Dr, Altona North VIC 3025.